


MARINE

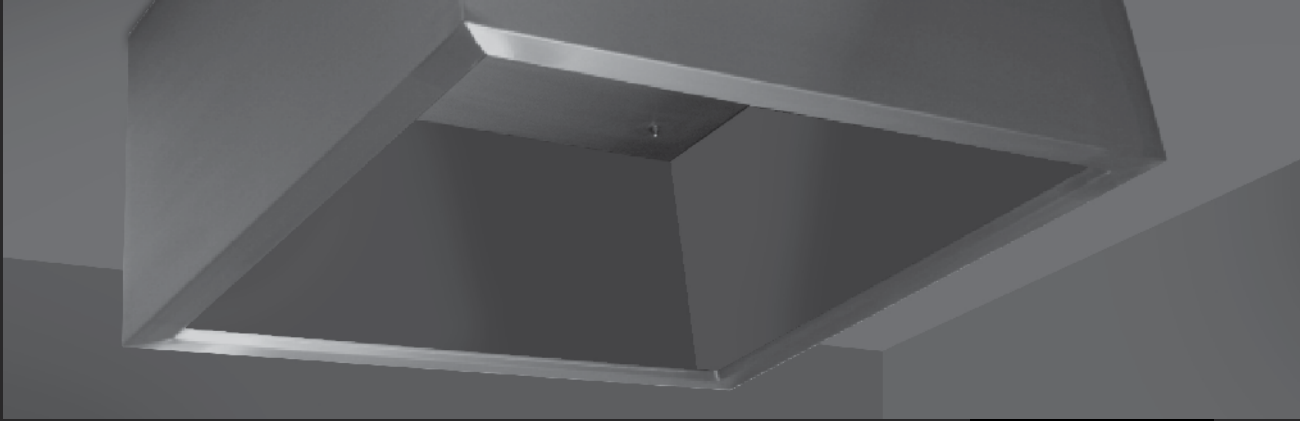

ADVANTAGES

- Provides a balanced climate in the galley
- Canopy is custom designed and fabricated
- Provides a high standards of hygiene
- Welded stainless steel construction
- Incorporates full perimeter condensation channel
- Easy to install

GB V-ADV CANOPY



V-ADV CONDENSE GALLEY CANOPY

Proper ventilation of the workplace removes unpleasant smells, excessive heat, smoke, fumes, moisture, and dust build-up preventing stagnation of the air. Vianen ADV canopy provide an efficient solution for the adequate ventilation for your galley.


APPLICATION

Suitable for all types of commercial dishwashing machines whether wall mounted or in an island arrangement. The ADV hood provides a relatively large buffer zone to capture the vapours.

DESIGN AND CONSTRUCTION

Vianen designs and produces custom canopy according to the specific requirements of the client and in accordance the standards; USPHS, NORSOK, SOLAS, CE and ISO. The canopy is fabricated from 1.0 – 1.2mm thick type AISI 304 or optional AISI 316L stainless steel. All visible surfaces are ultra- fine grain polished (320 grit) and polythene protected. The canopy is cut, punched and folded and factory assembled by seam welds and non-visible mechanical fixings. The canopy can be produced in seamless sections up to 6 meters in length. Joints are provided with internal cover-plates so that no joints or mechanical fixings are visible.

All metal edges are rolled smooth and are free from sharp edges and projections. The canopy lower edge is formed into a full perimeter condensation channel with inclined internal elevation to simplify cleaning and the inner edges are crush folded for safety purposes. Fitted directly under the duct spigot is a removable condensation plate. Drains in the gutter are optional. The canopy has a constant exhaust pressure drop of 40 Pa.

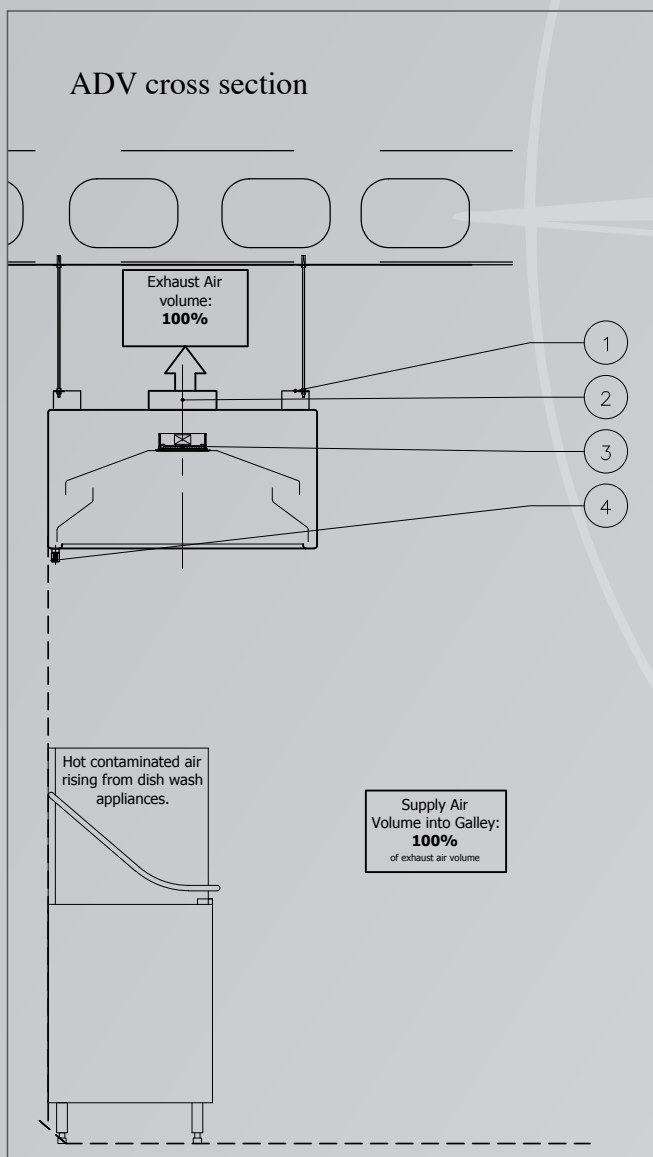

- ① Hanging brackets
- ② Duct spigots - exhaust
- ③ V-LEL Integrated light fittings (optional)
- ④ Grease drain

OPTIONAL

V-LEL INTEGRATED LIGHT FITTINGS IP65

The canopies are fitted with V-LEL, which are specially designed for VIANEN canopies.

The standard type is 220/230V – 50Hz.

Standard sizes : 1229 mm - 40 W

: 629 mm - 20 W

On request Vianen can deliver alternative light fittings to suit customer requirements. Inbuilt emergency lights can also be delivered upon request.



INSTALLATION

Hanging brackets are fitted on top of the corners of the hood for easy installation.

V-ADV - GALLEY SPECIFICATIONS

Standard	Optional
Material: AISI 304; Thickness 1.0 - 1.2mm	Material: AISI 316L
Crush folded inner edges	
	V-LEL, V-ITL lights or LED spots
Manufactured according to: SOLAS, CE, ISO	USPHS, NORSOK
Mounting brackets	
Duct spigots	Flanges up to: ISO 15138
	VéTEC® - Demand Control Ventilation System
	Maestro - Galley Management System
	Victoria - Intelligent Monitoring System
	Powder coated in any RAL colour

Vianen Marine B.V.
Finse Golf 18, 3446 CK Woerden
P.O Box 163, 3440 AD Woerden, Holland

info@vianenkvs.nl
www.vianenkvs.com
Tel.: (+31) 348 41 63 00

